
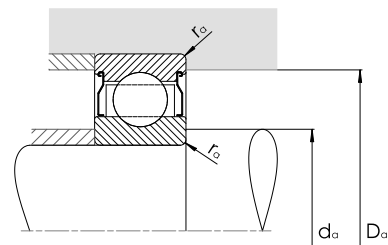


## Hochtemperatur-Rillenkugellager 60...-2Z/VA208, beidseitig abgedichtet





60...-2Z/VA208

Maßtabelle - Abmessungen in mm

| Haupt-<br>abmessungen |     |    | Tragzahlen      |                               | Grenz-<br>drehzahl | Grenz-<br>temperatur | Gewicht | Bezeichnung   |   |   |   |
|-----------------------|-----|----|-----------------|-------------------------------|--------------------|----------------------|---------|---------------|---|---|---|
| d                     | D   | B  | dyn.<br>C<br>kN | stat.<br>C <sub>0</sub><br>kN |                    |                      |         |               |   |   |   |
| 17                    | 35  | 10 | 6,37            | 3,25                          | 170                | 350                  | 0,041   | 6003-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 20                    | 42  | 12 | 9,95            | 5,00                          | 140                | 350                  | 0,071   | 6004-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 25                    | 47  | 12 | 11,90           | 6,55                          | 120                | 350                  | 0,083   | 6005-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 30                    | 55  | 13 | 13,80           | 8,30                          | 100                | 350                  | 0,120   | 6006-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 40                    | 68  | 15 | 17,80           | 11,00                         | 80                 | 350                  | 0,200   | 6008-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 50                    | 80  | 16 | 22,90           | 15,60                         | 60                 | 350                  | 0,270   | 6010-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 55                    | 90  | 18 | 29,60           | 21,20                         | 60                 | 350                  | 0,400   | 6011-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 100                   | 150 | 24 | 63,70           | 54,00                         | 30                 | 350                  | 1,330   | 6020-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 110                   | 170 | 28 | 85,20           | 73,50                         | 30                 | 350                  | 2,060   | 6022-2Z/VA208 | 🌐 | 🛒 | 📦 |
| 120                   | 180 | 28 | 88,40           | 80,00                         | 30                 | 350                  | 2,210   | 6024-2Z/VA208 | 🌐 | 🛒 | 📦 |

### Hochtemperatur-Rillenkugellager 60...-2Z./VA208, beidseitig abgedichtet

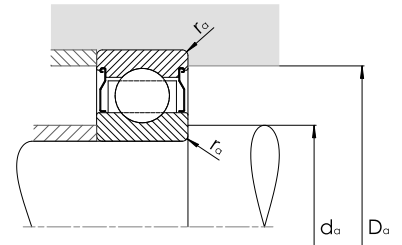

60...-2Z/VA208

| Bezeichnung   | Radiale Lagerluft |     | Einlaufen erforderlich | Anschlussmaße      |                    |                    |
|---------------|-------------------|-----|------------------------|--------------------|--------------------|--------------------|
|               | min               | max |                        | d <sub>α</sub> min | D <sub>α</sub> max | r <sub>α</sub> max |
|               | μm                | μm  |                        |                    |                    |                    |
| 6003-2Z/VA208 | 100               | 180 | –                      | 19,0               | 33,0               | 0,3                |
| 6004-2Z/VA208 | 112               | 192 | –                      | 23,2               | 38,8               | 0,6                |
| 6005-2Z/VA208 | 120               | 212 | –                      | 28,2               | 43,8               | 0,6                |
| 6006-2Z/VA208 | 120               | 212 | –                      | 34,6               | 50,4               | 1,0                |
| 6008-2Z/VA208 | 160               | 256 | –                      | 44,6               | 63,4               | 1,0                |
| 6010-2Z/VA208 | 180               | 292 | –                      | 54,6               | 75,4               | 1,0                |
| 6011-2Z/VA208 | 220               | 360 | –                      | 61,0               | 84,0               | 1,0                |
| 6020-2Z/VA208 | 300               | 480 | –                      | 107,0              | 143,0              | 1,5                |
| 6022-2Z/VA208 | 360               | 560 | –                      | 119,0              | 161,0              | 2,0                |
| 6024-2Z/VA208 | 360               | 560 | –                      | 129,0              | 171,0              | 2,0                |