
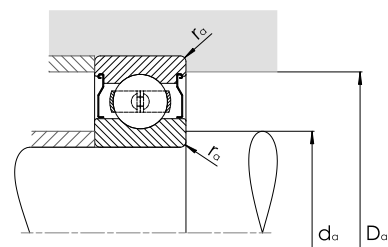


Hochtemperatur-Rillenkugellager 62...-2Z/VA201, beidseitig abgedichtet





62...-2Z/VA201

Maßtable - Abmessungen in mm

Hauptabmessungen			Tragzahlen		Grenzdrehzahl	Grenztemperatur	Gewicht	Bezeichnung		
d	D	B	dyn. C kN	stat. C ₀ kN	min ⁻¹	°C	kg			
12	32	10	7,28	3,10	200	250	0,040	6201-2Z/VA201	🌐	🛒
15	35	11	8,06	3,75	180	250	0,048	6202-2Z/VA201	🌐	🛒
17	40	12	9,95	4,75	150	250	0,068	6203-2Z/VA201	🌐	🛒
20	47	14	13,50	6,55	130	250	0,110	6204-2Z/VA201	🌐	🛒
25	52	15	14,80	7,80	110	250	0,130	6205-2Z/VA201	🌐	🛒
30	62	16	20,30	11,20	90	250	0,210	6206-2Z/VA201	🌐	🛒
35	72	17	27,00	15,30	80	250	0,300	6207-2Z/VA201	🌐	🛒
40	80	18	32,50	19,00	70	250	0,380	6208-2Z/VA201	🌐	🛒
45	85	19	35,10	21,60	70	250	0,430	6209-2Z/VA201	🌐	🛒
50	90	20	37,10	23,20	60	250	0,470	6210-2Z/VA201	🌐	🛒
55	100	21	46,20	29,00	60	250	0,640	6211-2Z/VA201	🌐	🛒
60	110	22	55,30	36,00	50	250	0,810	6212-2Z/VA201	🌐	🛒
65	120	23	58,50	40,50	40	250	1,050	6213-2Z/VA201	🌐	🛒
70	125	24	63,70	45,00	40	250	1,130	6214-2Z/VA201	🌐	🛒
75	130	25	68,90	49,00	40	250	1,230	6215-2Z/VA201	🌐	🛒
95	170	32	114,00	81,50	30	250	2,710	6219-2Z/VA201	🌐	🛒

Hochtemperatur-Rillenkugellager 62...-2Z/VA201, beidseitig abgedichtet

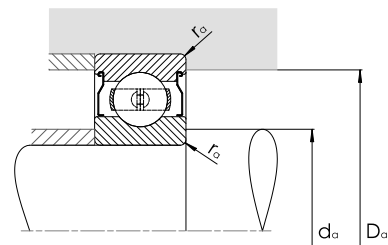

62...-2Z/VA201

Bezeichnung	Radiale Lagerluft		Einlaufen erforderlich	Anschlussmaße		
	min	max		d _α min	D _α max	r _α max
	μm	μm				
6201-2Z/VA201	100	180	•	16,2	27,8	0,6
6202-2Z/VA201	100	180	•	19,2	30,8	0,6
6203-2Z/VA201	100	180	•	21,2	35,8	0,6
6204-2Z/VA201	112	192	•	25,6	41,4	1,0
6205-2Z/VA201	120	212	•	30,6	46,4	1,0
6206-2Z/VA201	120	212	•	35,6	56,4	1,0
6207-2Z/VA201	160	256	•	42,0	65,0	1,0
6208-2Z/VA201	160	256	•	47,0	73,0	1,0
6209-2Z/VA201	180	292	•	52,0	78,0	1,0
6210-2Z/VA201	180	292	•	57,0	83,0	1,0
6211-2Z/VA201	220	360	•	64,0	91,0	1,5
6212-2Z/VA201	220	360	•	69,0	101,0	1,5
6213-2Z/VA201	220	360	•	74,0	128,0	1,5
6214-2Z/VA201	260	420	•	79,0	116,0	1,5
6215-2Z/VA201	260	420	•	84,0	121,0	1,5
6219-2Z/VA201	300	480	•	107,0	158,0	2,0