
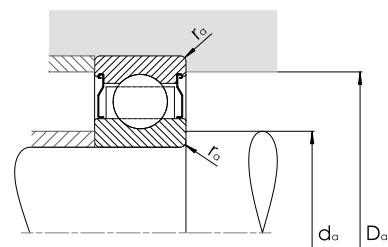


Hochtemperatur-Rillenkugellager 62...-2Z/VA208, beidseitig abgedichtet





62...-2Z/VA208

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Grenz- drehzahl	Grenz- temperatur	Gewicht	Bezeichnung		
d	D	B	dyn. C kN	stat. C ₀ kN	min ⁻¹	°C	kg			
12	32	10	7,28	3,10	200	350	0,040	6201-2Z/VA208		
15	35	11	8,06	3,75	180	350	0,048	6202-2Z/VA208		
17	40	12	9,95	4,75	150	350	0,068	6203-2Z/VA208		
20	47	14	13,50	6,55	130	350	0,110	6204-2Z/VA208		
25	52	15	14,80	7,80	110	350	0,130	6205-2Z/VA208		
30	62	16	20,30	11,20	90	350	0,210	6206-2Z/VA208		
35	72	17	27,00	15,30	80	350	0,300	6207-2Z/VA208		
40	80	18	32,50	19,00	70	350	0,380	6208-2Z/VA208		
45	85	19	35,10	21,60	60	350	0,430	6209-2Z/VA208		
50	90	20	37,10	23,20	60	350	0,470	6210-2Z/VA208		
55	100	21	46,20	29,00	50	350	0,640	6211-2Z/VA208		
60	110	22	55,30	36,00	50	350	0,810	6212-2Z/VA208		
65	120	23	58,50	40,50	40	350	1,050	6213-2Z/VA208		
70	125	24	63,70	45,00	40	350	1,130	6214-2Z/VA208		
75	130	25	68,90	49,00	40	350	1,230	6215-2Z/VA208		
80	140	26	72,80	55,00	40	350	1,530	6216-2Z/VA208		
85	150	28	87,10	64,00	30	350	1,880	6217-2Z/VA208		
90	160	30	101,00	73,50	30	350	2,300	6218-2Z/VA208		
95	170	32	114,00	81,50	30	350	2,710	6219-2Z/VA208		
100	180	34	127,00	93,00	30	350	3,270	6220-2Z/VA208		

Hochtemperatur-Rillenkugellager 62...-2Z/VA208, beidseitig abgedichtet

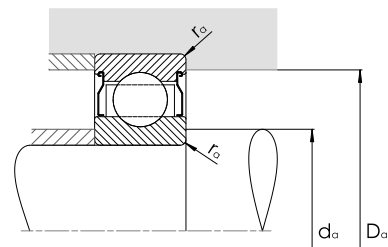

62...-2Z/VA208

Bezeichnung	Radiale Lagerluft		Einlaufen erforderlich	Anschlussmaße		
	min µm	max µm		da min	Da max	ra max
6201-2Z/VA208	100	180	–	16,2	27,8	0,6
6202-2Z/VA208	100	180	–	19,2	30,8	0,6
6203-2Z/VA208	100	180	–	21,2	35,8	0,6
6204-2Z/VA208	112	192	–	25,6	41,4	1,0
6205-2Z/VA208	120	212	–	30,6	46,4	1,0
6206-2Z/VA208	120	212	–	35,6	56,4	1,0
6207-2Z/VA208	160	256	–	42,0	65,0	1,0
6208-2Z/VA208	160	256	–	47,0	73,0	1,0
6209-2Z/VA208	180	292	–	52,0	78,0	1,0
6210-2Z/VA208	180	292	–	57,0	83,0	1,0
6211-2Z/VA208	220	360	–	64,0	91,0	1,5
6212-2Z/VA208	220	360	–	69,0	101,0	1,5
6213-2Z/VA208	220	360	–	74,0	111,0	1,5
6214-2Z/VA208	260	420	–	79,0	116,0	1,5
6215-2Z/VA208	260	420	–	84,0	121,0	1,5
6216-2Z/VA208	260	420	–	91,0	129,0	2,0
6217-2Z/VA208	300	480	–	96,0	139,0	2,0
6218-2Z/VA208	300	480	–	101,0	149,0	2,0
6219-2Z/VA208	300	480	–	107,0	158,0	2,0
6220-2Z/VA208	300	480	–	112,0	168,0	2,0