
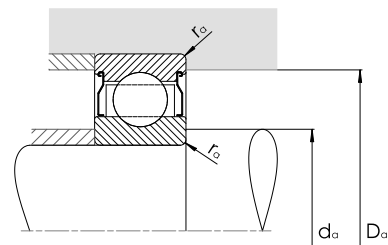


Hochtemperatur-Rillenkugellager 63...-2Z./VA208, beidseitig abgedichtet





63...-2Z/VA208

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Grenz- drehzahl	Grenz- temperatur	Gewicht	Bezeichnung			
d	D	B	dyn. C kN	stat. C ₀ kN							
20	52	15	16,80	7,80	120	350	0,150	6304-2Z/VA208	🌐	🛒	📦
25	62	17	23,40	11,60	100	350	0,230	6305-2Z/VA208	🌐	🛒	📦
30	72	19	29,60	16,00	80	350	0,360	6306-2Z/VA208	🌐	🛒	📦
35	80	21	35,10	19,00	80	250	0,480	6307-2Z/VA208	🌐	🛒	📦
40	90	23	42,30	24,00	60	350	0,650	6308-2Z/VA208	🌐	🛒	📦
45	100	25	55,30	31,50	60	350	0,870	6309-2Z/VA208	🌐	🛒	📦
50	110	27	65,00	38,00	50	350	1,120	6310-2Z/VA208	🌐	🛒	📦
55	120	29	74,10	45,00	50	350	1,420	6311-2Z/VA208	🌐	🛒	📦
60	130	31	85,20	52,00	40	350	1,780	6312-2Z/VA208	🌐	🛒	📦
65	140	33	97,50	60,00	40	350	2,190	6313-2Z/VA208	🌐	🛒	📦
70	150	35	111,00	68,00	40	350	2,650	6314-2Z/VA208	🌐	🛒	📦
75	160	37	119,00	76,50	30	350	3,170	6315-2Z/VA208	🌐	🛒	📦
80	170	39	130,00	86,50	30	350	3,730	6316-2Z/VA208	🌐	🛒	📦

Hochtemperatur-Rillenkugellager 63...-2Z/VA208, beidseitig abgedichtet

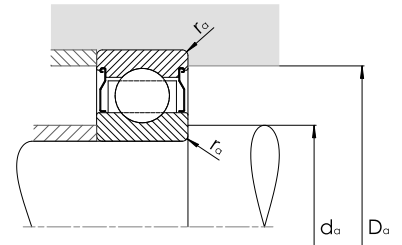

63...-2Z/VA208

Bezeichnung	Radiale Lagerluft		Einlaufen erforderlich	Anschlussmaße		
	min	max		d _α min	D _α max	r _α max
	μm	μm				
6304-2Z/VA208	112	192	–	27,0	45,0	1,0
6305-2Z/VA208	120	212	–	32,0	36,5	1,0
6306-2Z/VA208	120	212	–	37,0	65,0	1,0
6307-2Z/VA208	160	256	–	44,0	71,0	1,5
6308-2Z/VA208	160	256	–	49,0	81,0	1,5
6309-2Z/VA208	180	292	–	54,0	91,0	1,5
6310-2Z/VA208	180	292	–	61,0	99,0	2,0
6311-2Z/VA208	220	360	–	66,0	109,0	2,0
6312-2Z/VA208	220	360	–	72,0	118,0	2,0
6313-2Z/VA208	220	360	–	77,0	128,0	2,0
6314-2Z/VA208	260	420	–	82,0	138,0	2,0
6315-2Z/VA208	260	420	–	87,0	148,0	2,0
6316-2Z/VA208	260	420	–	92,0	158,0	2,0