
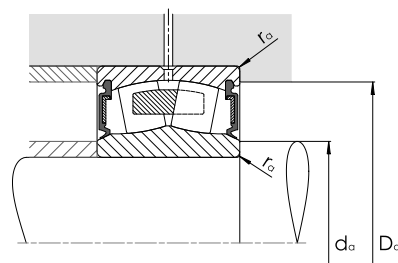


abgedichtete Pendelrollenlager – Baureihe 223...-2RS/VT143



223...-2RS/VT143



zylindrische Bohrung

Anschlussmaße

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenzbelastung	Grenzdrehzahl	Gewicht	Kurzzeichen
			dyn.	stat.				
d	D	B	C kN	C ₀ kN	C _u kN	n _G min ⁻¹	m kg	
130	280	93	1.120	1.320	114	500	29,0	22326-2RS5/VT143  
140	300	102	1.290	1.560	132	430	36,5	22328-2RS5/VT143  
150	320	108	1.460	1.760	146	400	43,5	22330-2RS5/VT143  
160	340	114	1.600	1.960	160	380	52,0	22332-2RS5/VT143  
220	460	145	2.700	3.450	260	300	115,0	22344-2RS5/VT143  

abgedichtete Pendelrollenlager – Baureihe 223...-2RSK/VT143

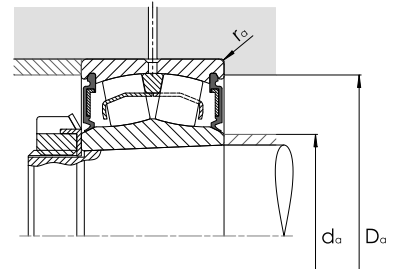

223...-2RSK/VT143

kegelige Bohrung, Kegel 1:12

Anschlussmaße

Abmessungen						Anschlussmaße				Berechnungsfaktoren			
d	d ₂	D ₁	b	K	r _{1,2} min.	d _a min.	d _a max.	D _a max.	r _a max.	e	Y ₁	Y ₂	Y ₀
130	159	246	16,7	9	4,0	147	159	263	3,0	0,3	2,0	3,0	2,0
140	169	261	16,7	9	4,0	157	169	283	3,0	0,3	2,0	3,0	2,0
150	181	281	16,7	9	4,0	167	181	303	3,0	0,3	2,0	3,0	2,0
160	193	296	16,7	9	4,0	177	193	323	3,0	0,3	2,0	3,0	2,0
220	270	406	22,3	12	5,0	240	270	440	4,0	0,3	2,3	3,4	2,2