



Nadellager NA69 mit Borden, mit Innenring, ohne Dichtung

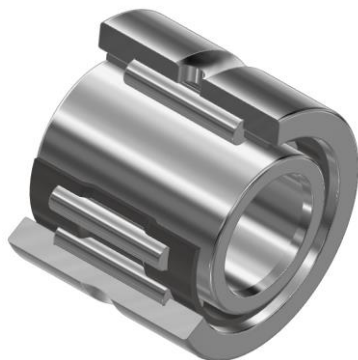


NA69 (einreihig)

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenz- belastung	Grenz- dreh- zahl	Bezugs- dreh- zahl	Gewicht	Kurzzeichen	Abmessungen		
			dyn.	stat.						F	r	s
d	D	C	C _r N	C _{0r} N	C _{ur} N	n _G min ⁻¹	n _B min ⁻¹	m ≈ g			min.	
12	24	22	18.100	21.600	3.800	23.200	13.300	46	NA6901	16	0,3	1,00
15	28	23	19.500	25.500	4.450	21.100	10.900	64	NA6902	20	0,3	1,00
17	30	23	21.100	29.000	5.100	20.000	9.800	72	NA6903	22	0,3	1,00
20	37	30	40.500	51.000	9.100	16.900	8.900	141	NA6904	25	0,3	1,00
22	39	30	42.000	55.000	9.900	15.300	7.900	150	NA69/22	28	0,3	0,50
25	42	30	44.000	59.000	10.600	14.400	7.500	161	NA6905	30	0,3	1,00
28	45	30	45.500	63.000	11.400	13.600	7.100	182	NA69/28	32	0,3	1,00
30	47	30	49.000	71.000	12.800	12.600	6.300	192	NA6906	35	0,3	1,00
32	52	36	53.000	82.000	15.100	11.100	6.100	288	NA69/32-ZW	40	0,6	0,50
35	55	36	54.000	86.000	15.900	10.700	5.900	310	NA6907-ZW	42	0,6	0,50
45	68	40	79.000	127.000	21.400	8.600	4.750	495	NA6909-ZW	52	0,6	0,50

1) Mit Verschlussringen, ohne Schmierbohrung und ohne Schmierrille.

Nadellager NA69...-ZW mit Borden, mit Innenring, ohne Dichtung, zweireihig



NA69...-ZW (zweireihig)

Maßtabelle - Abmessungen in mm																
Haupt- abmessungen			Tragzahlen		Ermüdungs- grenz- belastung	Grenz- dreh- zahl	Bezugs- dreh- zahl	Gewicht	Kurzzeichen	Abmessungen						
			dyn.	stat.												
d	D	C	C _r N	C _{0r} N	C _{ur} N	n _G min ⁻¹	n _B min ⁻¹	m ≈ g					F	r min.	s	
50	72	40	82.000	139.000	23.400	7.800	4.200	515	NA6910-ZW				58	0,6	0,50	
55	80	45	102.000	176.000	30.000	7.200	4.000	780	NA6911-ZW				63	1,0	1,50	
60	85	45	106.000	191.000	32.500	6.700	3.700	808	NA6912-ZW				68	1,0	1,50	
65	90	45	108.000	198.000	33.500	6.300	3.550	833	NA6913-ZW				72	1,0	1,50	
70	100	54	145.000	265.000	47.500	5.700	3.300	1.340	NA6914-ZW				80	1,0	1,00	
75	105	54	147.000	275.000	49.500	5.400	3.150	1.450	NA6915-ZW				85	1,0	1,00	
80	110	54	153.000	300.000	53.000	5.100	2.900	1.522	NA6916-ZW				90	1,0	1,00	
85	120	63	188.000	400.000	71.000	4.600	2.700	2.200	NA6917-ZW				100	1,1	1,00	
90	125	63	195.000	425.000	74.000	4.400	2.550	2.310	NA6918-ZW				105	1,1	1,00	
95	130	63	197.000	440.000	76.000	4.200	2.440	2.500	NA6919-ZW				110	1,1	1,00	

1) Mit Verschlussringen, ohne Schmierbohrung und ohne Schmierrille.