



Nadellager NAO ohne Borden, mit Innenring, ohne Dichtung





NAO

NAO...-IS1

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenz- belastung	Grenz- drehzahl	Bezugs- drehzahl	Gewicht	Kurzzeichen			
d	D	B	dyn. C_r N	stat. C_{0r} N	C_{ur} N	n_G min ⁻¹	n_B min ⁻¹	m ≈ g				
6	17	10	5.300	5.500	930	29.500	23.800	14,0	NAO6x17x10-TV-IS1	🌐	🛒	📦
9	22	12	11.300	9.900	1.740	26.000	17.900	23,5	NAO9x22x12-TV	🌐	🛒	📦
12	24	13	10.100	11.800	1.890	23.600	15.000	30,0	NAO12x24x13	🌐	🛒	📦
	28	12	13.000	12.500	2.210	22.900	14.300	40,0	NAO12x28x12-IS1	🌐	🛒	📦
15	28	13	11.100	14.300	2.310	21.300	12.100	29,0	NAO15x28x13	🌐	🛒	📦
	32	12	15.100	16.200	2.850	20.900	11.400	50,0	NAO15x32x12-IS1	🌐	🛒	📦
17	30	13	11.800	15.900	2.550	20.400	11.100	42,0	NAO17x30x13	🌐	🛒	📦
	35	16	22.600	25.500	4.200	19.200	10.100	78,0	NAO17x35x16	🌐	🛒	📦
20	35	17	16.800	26.000	4.250	18.100	10.000	76,0	NAO20x35x17	🌐	🛒	📦
	37	16	23.500	27.500	4.550	17.200	9.100	82,0	NAO20x37x16	🌐	🛒	📦
25	40	17	22.100	34.000	5.300	15.100	8.100	88,0	NAO25x40x17	🌐	🛒	📦
	42	16	26.000	33.500	5.500	14.600	7.800	86,0	NAO25x42x16-IS1	🌐	🛒	📦

Nadellager NAO ohne Borden, mit Innenring, ohne Dichtung


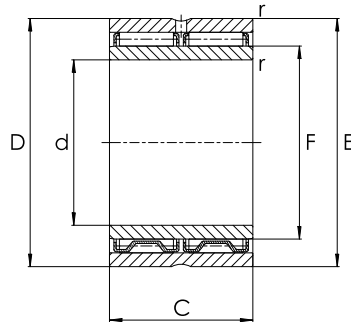


NAO...-ZW-ASR1

axialer Verschiebeweg „s“

Abmessungen					Anschlussmaße					
d	F	E	r min.	s	d _a	D _b	d _b	D _a	r _a	
6	10	13,0	0,3	0,50	9,7	10,3	12,7	13,3	0,3	
9	12	18,0	0,3	0,50	11,7	12,3	17,6	18,3	0,3	
12	16	20,0	0,3	0,50	15,7	16,4	19,6	20,3	0,3	
	16	22,0	0,3	0,50	15,7	16,4	21,6	22,3	0,3	
15	20	24,0	0,3	0,50	19,7	20,4	23,6	24,3	0,3	
	20	26,0	0,3	0,50	19,7	20,4	25,6	26,5	0,3	
17	22	26,0	0,3	0,50	21,5	22,4	25,6	26,3	0,3	
	22	29,0	0,3	0,50	21,5	22,4	28,4	29,5	0,3	
20	25	29,0	0,3	0,50	24,5	25,6	28,4	29,5	0,3	
	25	32,0	0,3	0,50	24,5	25,6	31,4	32,5	0,3	
25	30	35,0	0,3	0,80	29,5	30,6	34,4	35,5	0,3	
	30	37,0	0,3	0,80	29,5	30,6	36,4	37,5	0,3	

Nadellager NAO ohne Borden, mit Innenring, ohne Dichtung





NAO

NAO...-IS1

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenz- belastung	Grenz- drehzahl	Bezugs- drehzahl	Gewicht	Kurzzeichen			
d	D	B	dyn. C_r N	stat. C_{0r} N	C_{ur} N	n_G min ⁻¹	n_B min ⁻¹	m ≈ g				
25	42	32	45.000	67.000	11.000	14.600	7.800	190,0	NAO25x42x32-ZW-ASR1	🌐	🛒	📦
30	45	17	23.500	38.500	6.100	13.100	7.100	102,0	NAO30x45x17	🌐	🛒	📦
	45	26	31.500	56.000	8.900	13.100	7.200	157,0	NAO30x45x26-ZW-ASR1	🌐	🛒	📦
	47	16	27.500	37.500	6.200	12.700	6.900	109,0	NAO30x47x16	🌐	🛒	📦
	47	18	31.000	43.000	7.400	12.700	6.900	119,0	NAO30x47x18	🌐	🛒	📦
35	50	17	24.200	41.500	6.400	11.500	6.500	113,0	NAO35x50x17	🌐	🛒	📦
	55	20	37.000	57.000	8.900	11.300	6.200	190,0	NAO35x55x20	🌐	🛒	📦
40	55	17	25.500	46.000	7.100	10.300	5.900	127,0	NAO40x55x17	🌐	🛒	📦
50	68	20	32.000	66.000	10.700	8.500	5.100	230,0	NAO50x68x20-IS1	🌐	🛒	📦
70	100	30	80.000	176.000	31.000	5.800	3.350	850,0	NAO70x100x30	🌐	🛒	📦
80	110	30	76.000	172.000	29.500	5.200	3.200	920,0	NAO80x110x30	🌐	🛒	📦
90	120	30	80.000	188.000	32.000	4.700	2.950	1044,0	NAO90x120x30	🌐	🛒	📦

Nadellager NAO ohne Borden, mit Innenring, ohne Dichtung

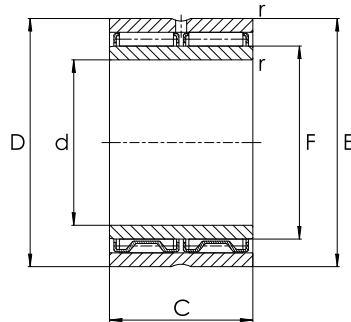

NAO...-ZW-ASR1

axialer Verschiebeweg „s“

Abmessungen					Anschlussmaße					
d	F	E	r min.	s	d _a	D _b	d _b	D _a	r _a	
25	30	37,0	0,3	0,80	29,5	30,6	36,4	37,5	0,3	
30	35	40,0	0,3	0,80	34,5	35,6	39,4	40,5	0,3	
	35	40,0	0,3	0,80	34,5	35,6	39,4	40,5	0,3	
	35	42,0	0,3	0,80	34,5	35,6	41,4	42,5	0,3	
	35	42,0	0,3	0,80	34,5	35,6	41,4	42,5	0,3	
35	40	45,0	0,3	0,80	39,5	40,6	44,4	45,5	0,3	
	40	47,0	0,3	0,80	39,5	40,6	46,2	47,5	0,3	
40	45	50,0	0,3	0,80	44,5	45,6	49,2	50,5	0,3	
50	55	60,0	0,6	1,00	54,5	55,8	59,2	60,8	0,6	
70	80	88,0	1,0	1,00	79,3	81,0	87,2	89,0	1,0	
80	90	98,0	1,0	1,00	89,3	91,0	97,2	99,0	1,0	
90	100	108,0	1,0	1,00	99,3	101,0	107,2	109,0	1,0	