


Toroidalrollenlager mit zylindrischer Bohrung, vollrollig



C22-V




zylindrische Bohrung

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenzbelastung	Grenz- drehzahl	Bezugs- drehzahl	Gewicht	Kurzzeichen
			dyn.	stat.					
d	D	B	C _r kN	C _{0r} kN	C _{ur} kN	n _G min ⁻¹	n _B min ⁻¹	m ≈ kg	
60	110	28	171	195	33	2.650	–	1,15	C2212-V   
65	120	31	208	216	36	2.340	–	1,52	C2213-V   
70	125	31	215	229	38	2.180	–	1,60	C2214-V   
75	130	31	221	241	39	2.050	–	1,69	C2215-V   
80	140	33	260	305	50	1.790	–	2,10	C2216-V   
85	150	36	315	395	59	1.640	–	2,65	C2217-V   

Toroidalrollenlager mit zylindrischer Bohrung, vollrollig

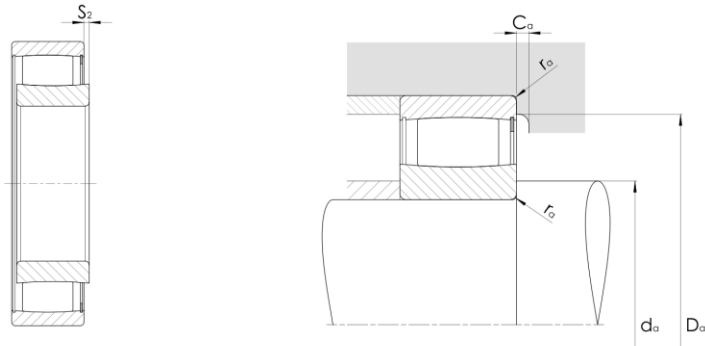

axialer Verschiebeweg

Anschlussmaße

Abmessungen						Anschlussmaße						Berechnungs- faktoren	
d	r min.	D ₁ ≈	d ₂ ≈	s ₁	s ₂	D _a		d _a		C _a	r _a max.	k _φ	k _δ
						max.	min.	max.	min.				
60	1,5	98,1	77,1	8,5	5,3	101	–	85	69	–	1,5	3,1	3,7
65	1,5	106,1	78,9	9,6	5,3	111	–	97	74	–	1,5	3,3	3,5
70	1,5	111,1	83,6	9,6	5,3	116	–	97	79	–	1,5	3,5	3,3
75	1,5	115,4	88,0	9,6	5,3	121	–	102	84	–	1,5	3,6	3,3
80	2,0	125,5	98,2	9,1	4,8	129	–	116	91	–	2,0	3,9	3,0
85	2,0	132,2	104,8	7,1	1,7	139	–	117	96	–	2,0	4,2	2,8