


Radial-Gelenklager GE...-HO-2RS, beidseitig abgedichtet







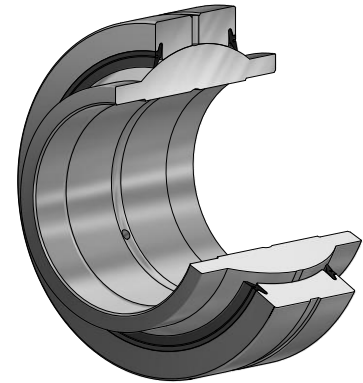























wartungspflichtig
 zylindrische Ansätze am Innenring
 Gleitpaarung: Stahl/Stahl



Baureihe: GE...-HO-2RS


GE...-HO-2RS

Maßtabelle - Abmessungen in mm

Wellen- durch- messer	Kurzeichen	Abmessungen				
		d	D	B	C	dk
d						
20	GE20-HO-2RS   	20 ^{-0,010}	35 ^{-0,011}	24 ^{±0,2}	12 ^{-0,24}	29,0 ¹⁾
25	GE25-HO-2RS   	25 ^{-0,010}	42 ^{-0,011}	29 ^{±0,3}	16 ^{-0,24}	35,5
30	GE30-HO-2RS   	30 ^{-0,010}	47 ^{-0,011}	30 ^{±0,3}	18 ^{-0,24}	40,7
35	GE35-HO-2RS   	35 ^{-0,012}	55 ^{-0,013}	35 ^{±0,3}	20 ^{-0,30}	47,0
40	GE40-HO-2RS   	40 ^{-0,012}	62 ^{-0,013}	38 ^{±0,3}	22 ^{-0,30}	53,0
45	GE45-HO-2RS   	45 ^{-0,012}	68 ^{-0,013}	40 ^{±0,3}	25 ^{-0,30}	60,0
50	GE50-HO-2RS   	50 ^{-0,012}	75 ^{-0,013}	43 ^{±0,3}	28 ^{-0,30}	66,0
60	GE60-HO-2RS   	60 ^{-0,015}	90 ^{-0,015}	54 ^{±0,3}	36 ^{-0,40}	80,0
70	GE70-HO-2RS   	70 ^{-0,015}	105 ^{-0,015}	65 ^{±0,3}	40 ^{-0,40}	92,0
80	GE80-HO-2RS   	80 ^{-0,015}	120 ^{-0,015}	74 ^{±0,3}	45 ^{-0,40}	105,0

-
- 1) Keine Schmiernut auf der Innenringkugel.
 - 2) Auch in den Gruppen C2 und C3 lieferbar.

Radial-Gelenklager GE...-HO-2RS, beidseitig abgedichtet

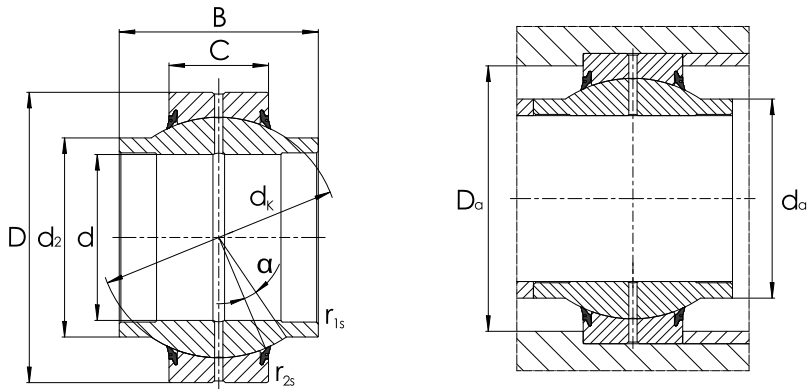

GE...-HO-2RS

Anschlussmaße

$d_2 = d_{a \max}$	α	Kantenabstände		Anschlussmaße	Tragzahlen		Radiale Lagerluft ²⁾	Gewicht	Wellen- durchmesser
		r_{1s}	r_{2s}		dyn.	stat.			
	Grad	min.	min.	min.	C_r	C_{0r}	CN	≈ kg	d
24,0	3	0,2	0,3	27,5	30	146	0,040 – 0,084	0,069	20
29,0	3	0,2	0,6	33,0	48	240	0,050 – 0,100	0,120	25
34,2	3	0,2	0,6	38,0	62	310	0,050 – 0,100	0,150	30
40,0	3	0,3	1,0	44,5	80	400	0,050 – 0,100	0,260	35
45,0	3	0,3	1,0	51,0	100	500	0,060 – 0,120	0,320	40
51,5	3	0,3	1,0	57,0	127	640	0,060 – 0,120	0,430	45
56,5	3	0,3	1,0	63,0	156	780	0,060 – 0,120	0,550	50
67,7	3	0,3	1,0	75,0	245	1.220	0,060 – 0,120	1,100	60
78,0	3	0,3	1,0	87,0	315	1.560	0,072 – 0,142	1,600	70
90,0	3	0,3	1,0	99,0	400	2.000	0,072 – 0,142	2,500	80