



Triplex Rollenkette DIN 8188



Triplex Rollenkette

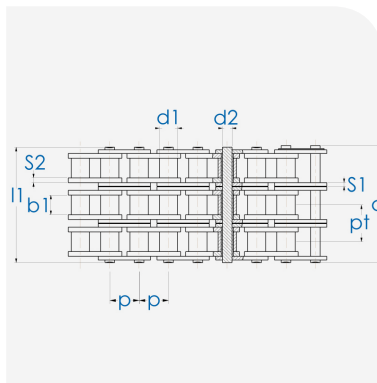

Querschnitt

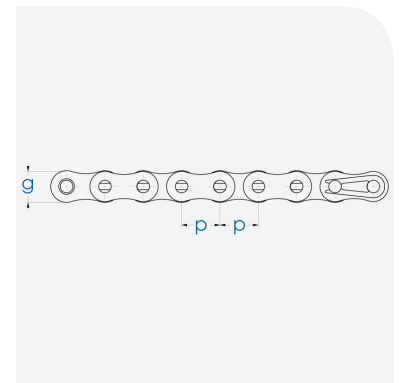

Querschnitt



Bezeichnung		Abmessungen										Gewicht
ANSI	Teilung	Lichte Weite	Rollendurchmesser	Bolzendurchmesser	Laschenhöhe	Laschendicke	Bolzenlänge	Bolzenlänge (VGL)				
	p	b1	d1	d2	g	S1	S2	l1	a			kg/m
	mm	zoll	mm	mm	mm	mm	mm	mm	mm	mm	mm	
04C-3	25-3	6,35	-	3,18	3,3	2,31	6	0,8	21	21,5	6,4	0,28
06C-3	35-3	9,525	-	4,77	5,08	3,58	9	1,3	32,7	33,5	10,13	0,63
08A-3	40-3	12,7	1/2	7,85	7,95	3,96	12	1,5	45,4	46,6	14,38	0,81
10A-3	50-3	15,875	5/8	9,4	10,16	5,08	15,1	2	57	58,5	18,11	1,12
12A-3	60-3	19,05	3/4	12,57	11,91	5,94	18	2,4	71,5	73,3	22,78	2
16A-3	80-3	25,4	1	15,75	15,88	7,92	24	3,3	91,7	93,6	29,29	2,92
20A-3	100-3	31,75	1 1/4	18,9	19,05	9,53	30	4	112,2	116,3	35,76	5,15
24A-3	120-3	38,1	1 1/2	25,22	22,23	11,1	35,7	4,8	141,4	145,2	45,44	7,8
28A-3	140-3	44,45	1 3/4	25,22	25,4	12,7	41	5,6	152,2	156,8	48,87	11,7
32A-3	160-3	50,8	2	31,55	28,58	14,27	47,8	6,4	181,8	186,6	58,55	15,14
36A-3	180-3	57,15	2 1/4	35,48	35,71	17,46	53,6	7,2	204,4	210,2	65,84	20,14
40A-3	200-3	63,5	2 1/2	37,85	39,68	19,85	60	8	223,5	230,4	71,55	29,22
48A-3	240-3	76,2	3	47,35	47,63	23,81	72,4	9,5	271,3	278,6	87,83	32,24