


Nadellager RNA48 mit Borden, ohne Innenring, ohne Dichtung

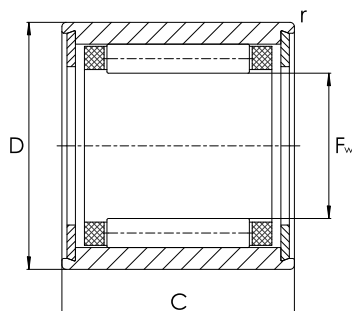

RNA48

Maßtabelle - Abmessungen in mm

Haupt- abmessungen			Tragzahlen		Ermüdungs- grenz- belastung	Grenz- drehzahl	Bezugs- drehzahl	Gewicht	Kurzzeichen	Ab- messungen
F _w	D	C	dyn. C _r N	stat. C _{0r} N						
					C _{ur} N	n _G min ⁻¹	n _B min ⁻¹	m ≈ g		r min.
120	140	30	106.000	216.000	36.000	3.900	2.340	670	RNA4822	1,0
130	150	30	112.000	239.000	39.000	3.600	2.120	730	RNA4824	1,0
145	165	35	134.000	310.000	48.500	3.250	2.000	990	RNA4826	1,1
155	175	35	136.000	325.000	50.000	3.050	1.870	1.050	RNA4828	1,1
165	190	40	172.000	400.000	62.000	2.850	1.830	1.600	RNA4830	1,1
175	200	40	181.000	435.000	66.000	2.700	1.700	1.700	RNA4832	1,1
185	215	45	209.000	510.000	75.000	2.550	1.640	2.540	RNA4834	1,1
195	225	45	219.000	550.000	80.000	2.420	1.510	2.680	RNA4836	1,1
210	240	50	255.000	690.000	100.000	2.250	1.360	3.210	RNA4838	1,5
220	250	50	260.000	720.000	102.000	2.150	1.280	3.350	RNA4840	1,5
240	270	50	275.000	790.000	110.000	1.980	1.130	3.620	RNA4844	1,5
265	300	60	400.000	1.080.000	150.000	1.780	980	5.400	RNA4848	2,0
285	320	60	415.000	1.160.000	158.000	1.660	890	5.800	RNA4852	2,0
305	350	69	510.000	1.300.000	175.000	1.540	850	9.300	RNA4856	2,0
330	380	80	700.000	1.770.000	235.000	1.420	740	12.700	RNA4860	2,1
350	400	80	710.000	1.850.000	242.000	1.340	680	13.400	RNA4864	2,1
370	420	80	730.000	1.940.000	249.000	1.270	640	14.000	RNA4868	2,1
390	440	80	740.000	2.020.000	255.000	1.210	600	14.800	RNA4872	2,1
415	480	100	1.130.000	2.900.000	370.000	1.130	520	26.000	RNA4876	2,1